




ORGANIC RIGID COREBOARD ANTISTATIC

**MOISTURE DEFENSE TECHNOLOGY**


# Flooring Trim Solutions

## Water Resistant Laminate | Trim Length 7' 10"


Trim dimensions are approximate. Trims are coordinating, color or graining may not be exact.




**T-MOLD** is used when joining two floors of equal height, such as in a doorway, between two rooms or in a large area where the maximum length/width is exceeded.

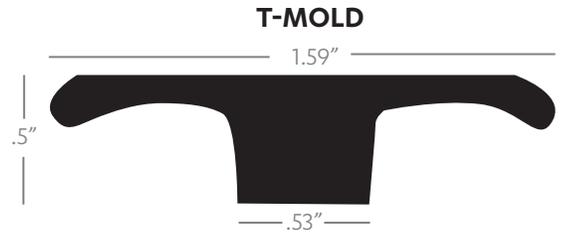



**REDUCER** is used when ending the flooring onto a surface such as concrete.

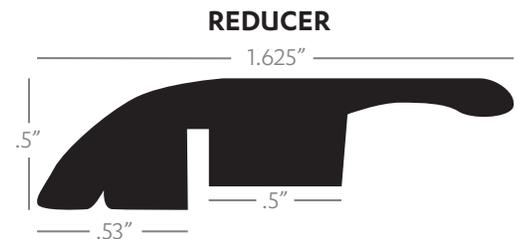


**END CAP** (often times called Square Edge or Threshold) is most commonly used when butting up to carpet or a sliding glass door.



**QUARTER ROUND** is most commonly applied to cover the expansion gap between the flooring and the wall.



**STAIR NOSE** is used when ending flooring at the top of either a landing or downward staircase.

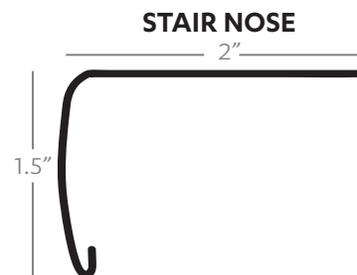

### QNOSE



**FLUSH SQUARE NOSE 48"**  
Contact T&A Supply for Qnose

**SHIMS AND TRACK** may be require with this product. Contact T&A Supply to confirm.