


SPECMASTER 2.0 MM




2.0 MM GLUE DOWN LUXURY VINYL, 12 MIL



Norwood | CTLV0501

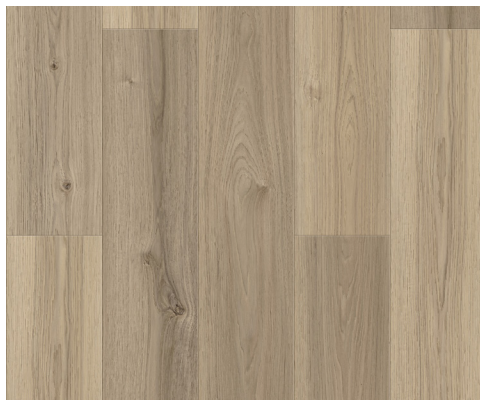


Sheridan | CTLV0502

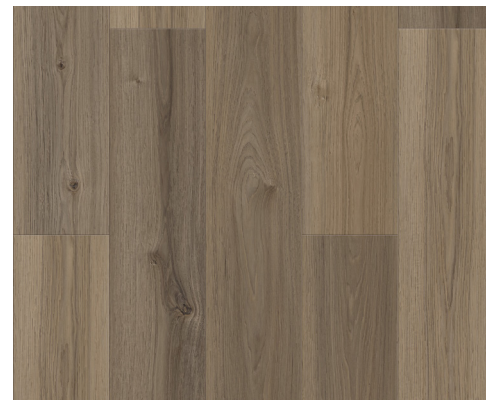

Albany | CTLV0503



Ashland | CTLV0504

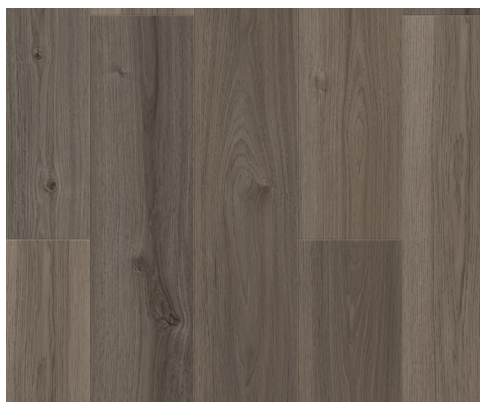

Hillside | CTLV0505



Stonebrook | CTLV0506

SPECIFICATIONS

Construction	Glue Down Luxury Vinyl
Dimensions	7.25" Wide x 48" Long, 185 mm x 1229 mm
Overall Thickness	2.0 mm (<i>All colors also available in 5.0 mm</i>)
Wear Layer	12 mil
Finish	Ultra Scuff UV Ceramic Bead
Texture	Embossed
Edge Profile	Softed Rolled Edge
Installation	Glue Down
Warranty	25 Yr Residential/Multi-Family Residence, 5 Yr Light Commercial/Multi-Family Common Areas
Packaging	58.74 sf/carton - 45 carton/pallet - 2643 sf/pallet

INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F, RH Between 35% - 55%
- Do not net or compression fit
- Minimum 3500 PSI for Concrete/Gypsum
- Hydro Radiant Heat approved ($\leq 85^{\circ}\text{F}$)
- Roll flooring immediately after installation in two directions, reroll 2 hours later
- Follow adhesive instructions for substrate moisture, coverage, PH, porosity, and open time
- Repair or replace worn trowel notches
- Insure floor flatness to within 1/8" in 6'

Read Complete Instructions Before Installing



tasflooring.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

