

SPECMASTER 5.0 MM



5.0 MM GLUE DOWN LUXURY VINYL, 20 MIL



Moraga | CTLV0401




Grove | CTLV0402



Balboa | CTLV0403



Belvedere | CTLV0404

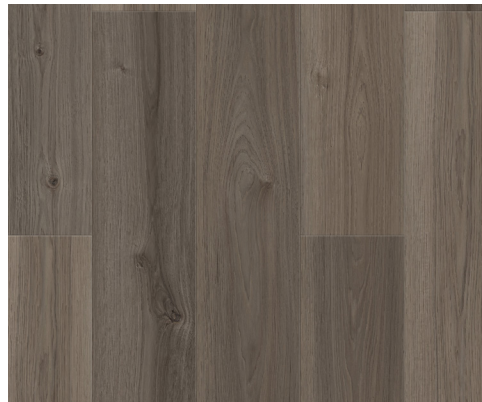

Skyline | CTLV0405



Granville | CTLV0406

SPECIFICATIONS

Construction	Glue Down Luxury Vinyl
Dimensions	7.25" Wide x 48" Long, 185 mm x 1229 mm
Overall Thickness	5.0 mm (<i>All colors also available in 2.0 mm</i>)
Wear Layer	20 mil
Finish	Ultra Scuff UV Ceramic Bead
Texture	Embossed
Edge Profile	Softed Rolled Edge
Installation	Glue Down
Warranty	30 Yr Residential/Multi-Family Residence, 10 Yr Commercial/Multi-Family Common Areas
Packaging	22.026 sf/carton - 50 carton/pallet - 1101 sf/pallet

INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F, RH Between 35% - 55%
- Do not net or compression fit
- Minimum 3500 PSI for Concrete/Gypsum
- Hydro Radiant Heat approved (≤ 85°F)
- Roll flooring immediately after installation in two directions, reroll 2 hours later
- Follow adhesive instructions for substrate moisture, coverage, PH, porosity, and open time
- Repair or replace worn trowel notches
- Insure floor flatness to within 1/8" in 6'

Read Complete Instructions Before Installing



tasflooring.com

SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE

