

EVC | 7.5 MM, 20 MIL




Acacia | JBTANDEMACAWT



Ashford | JBTANDEMASH




Dover | JBTANDEMDOV

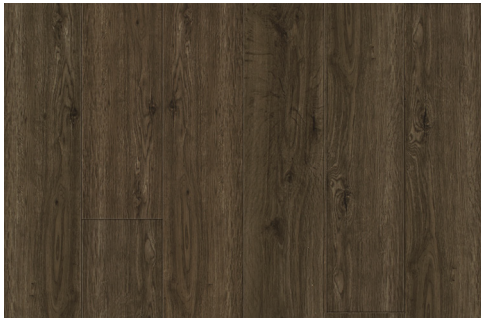

Glasgow | JBTANDEMGLA




Norwich | JBTANDEMNR

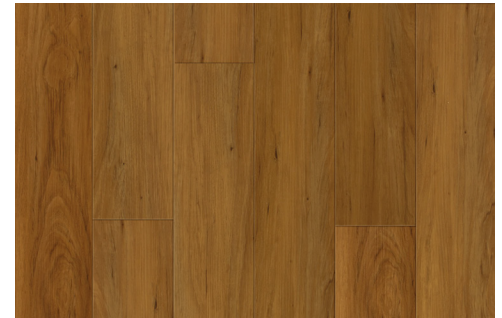

Oban | JBTANDEMOBA



Rockport | JBTANDEMROC

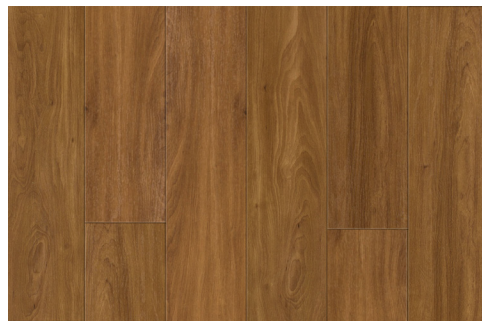

Sussex | JBTANDEMSUS

SPECIFICATIONS

Construction	Engineered Vinyl Click (EVC) Waterproof Core
Classification	ASTMF F3261, Class III, Type B
Dimensions	5.75" Wide x 48" Long, 146 mm x 1217 mm
Overall Thickness	7.5 mm (includes 2.0 mm EVA pad)
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane, Super Protect Coating
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	15.30 sf/carton - 84 carton/pallet - 1285.2 sf/pallet
Installation	Angle / Angle
Warranty	30 Yr Residential, 10 Yr Light Commercial, 10 Yr Multi-Family

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH between 35% to 60%
- Work out of multiple boxes, mixing product for visual appearance
- Subfloor dry and flat (3/16" in 10')

Read Complete Instructions Before Installing



**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

